




37" HIGH BACKBAR

MODULAR COMPONENTS

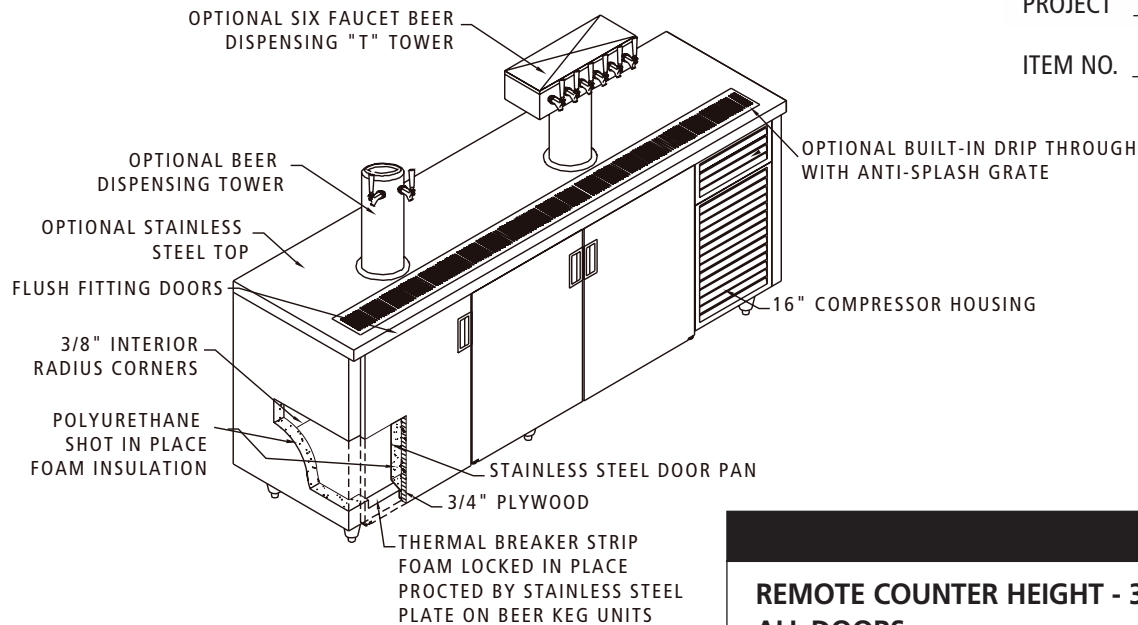

PROJECT _____

ITEM NO. _____



Detail of radius corner and tanked bottom



MODELS

REMOTE COUNTER HEIGHT - 37" BODY HEIGHT ALL DOORS

Length	Depth	#Sections	Model
☐ 25.1/2"	24"	1	IBCKR-1D
☐ 48"	24"	2	IBCKR-2D
☐ 72"	24"	3	IBCKR-3D
☐ 96"	24"	4	IBCKR-4D

SELF CONTAINED LOW HEIGHT REFRIGERATORS ALL DOORS

Length	Depth	#Sections	Model
☐ 40.1/2"	24"	1	IBCKS-1D
☐ 63"	24"	2	IBCKS-2D
☐ 87"	24"	3	IBCKS-3D
☐ 111"	24"	4	IBCKS-4D

STANDARD FEATURES

- All Heli-arc welded construction
- All 18 gauge type 304, 18/8 stainless steel interiors and doors
- Polyurethane "shot-in-place" insulation
- Door actuated interior lights
- Magnetic door gasket
- Easy clean with 3/8 radius interior corners
- Heavy duty breaker strip 'foam-locked' in position
- Pre-wired internal flexible conduit to a single point connection

OPTIONS


- ☐ LD Laminated Doors
- ☐ FLD Field Laminated Door
- ☐ ST Stainless Steel Top
- ☐ SSD Stainless Steel Doors
- ☐ CS Heavy Duty Casters
- ☐ CL 6" high stainless steel adjustable legs
- ☐ DL Door locks (Each)
- ☐ SSP Stainless Steel Side Panels (Each)
- ☐ SSR Stainless Steel Rear Panel
- ☐ SSB Stainless Steel Bottom Panel
- ☐ S Self Contained
- ☐ M Modified - Custom



37" HIGH BACKBAR

MODULAR COMPONENTS

COMPRESSOR HOUSING
REFRIGERATION AND DRAIN
LINE STUB-OUTS (RIGHT OR LEFT SIDE)

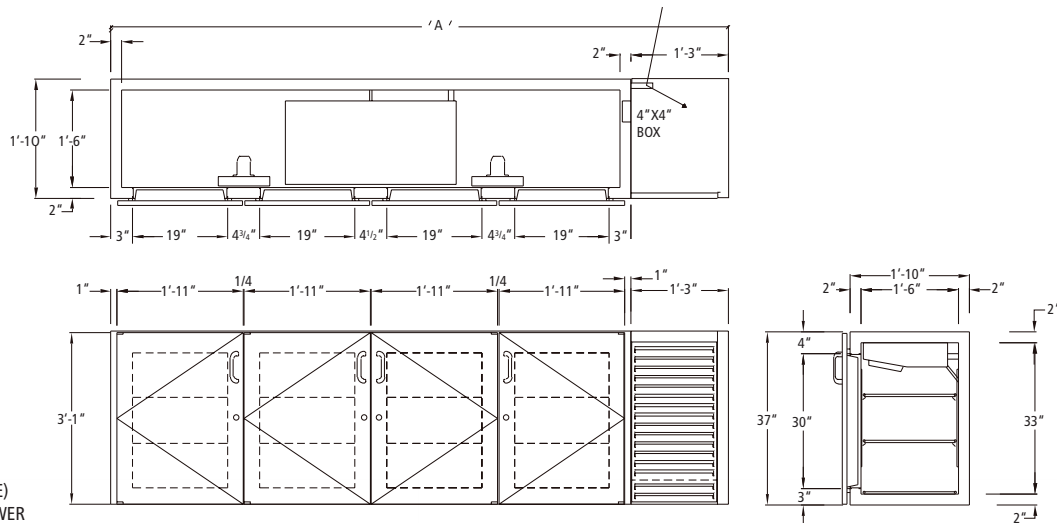

BEER (AND WINE)
DISPENSING TOWER
BY OTHERS

DRIP TROUGH
WITH ANTI-SPLASH
(BY OTHERS) PLATE

OPTIONAL STAINLESS
STEEL TOP

2-1/2" Ø SLEEVE THRU TOP
FOR BEER AND WINE LINES
(BY INSTALLER)

6-1/2" CLEARANCE FOR
TAPPING EQUIPMENT AND
FITTINGS

OUTLINE OF BEER KEG

MODEL #ICKR & ILKR
SERIES BEER KEG-BACK BAR
REFRIGERATORS

16 GA. S/S #2B PERFORATED
FALSE BOTTOM PLATES

16 GA. S/S #2B
DOOR SILL CAP
PROTECTOR
(AT EACH DOOR
OPENING)

1.9/16" (left), 2" (left), 1'-8" (left), 2" (left)

NOTE:
BARREL SIZES VARY PER
MANUFACTURE
SIZES NOTED ARE MAXIMUM
DIMENSIONAL STANDARDS
1/2 BARREL EQUALS 16
GALLON CAPACITY

BARREL SIZE	BEER BARREL OUTSIDE DIMENSIONS		MINIMUM DOOR OPENING WITH TAPPING EQUIP. ATTACHED		BARREL WEIGHT (FULL)
	A"	B"	WIDTH	HEIGHT	
1/8 BARREL	13"	15"	19"	23"	55 LBS
1/4 BARREL	15"	16-1/2"	19"	23"	85 LBS
1/2 BARREL	18-1/2"	24"	19"	31"	160 LBS

BEER KEG REFRIGERATORS 37" BODY HEIGHT

REMOTE UNITS ALL DOORS

MODEL	DIMENSION 'A'	VOLTS	AMPS	PHASE	BTU'S	WEIGHT	CUBE
IBCKR-1D	25.1/2"	115v	1.2	1ph	1000	292	22
IBCKR-2D	48"	115v	2.3	1ph	1300	370	39
IBCKR-3D	72"	115v	2.3	1ph	1700	430	58
IBCKR-4D	96"	115v	2.3	1ph	2300	500	76

SELF CONTAINED

MODEL	DIMENSION 'A'	H.P	VOLTS	AMPS	PHASE	BTU'S	WEIGHT	CUBE
IBCKS-1D	40.1/2"	1/4 HP	115v	8.9	1ph	800	520	53
IBCKS-2D	63"	1/4 HP	115v	9.3	1ph	1000	630	53
IBCKS-3D	87"	1/3 HP	115v	10.3	1ph	1300	690	71
IBCKS-4D	111"	1/2 HP	115v	11.8	1ph	2300	1030	90